

## Using the Update Disc for DVR-630H-S/DVR-530H-S/DVR-433H-S/DVR-433-K

The updating process does not erase the recorded titles, timer recording settings, various system settings of this unit, and saved program guide data.

### The Updating Procedure for DVR-630H-S/DVR-530H-S/DVR-433H-S/DVR-433H-K (steps 1 to 8)

- Use the update disc and carry out the following updating procedure.
- Use the control buttons on the main unit for all operations.
- Steps **1** to **4** give details about your operations while steps **5** to **8** explain the status of this unit.

#### Notes

- It takes approximately 5 minutes for the updating process to complete.
- **The disc tray automatically opens during the updating process. If this unit is mounted in a rack with doors, be sure to open the doors in advance.**
- **DO NOT switch off the power, unplug the power cord, or close the disc tray by force.**
- Other operations and timer recordings are not available during the updating process.



- 1** Press **⏻** STANDBY/ON to switch on this unit.

POWER ON

- 2** Press **⏮** OPEN/CLOSE to open the disc tray.

- 3** Load the update disc on the disc tray. Do not close the disc tray.

- 4** Press **▶** (PLAY) while holding down **□** (STOP REC).

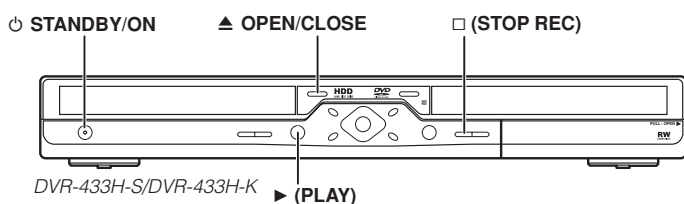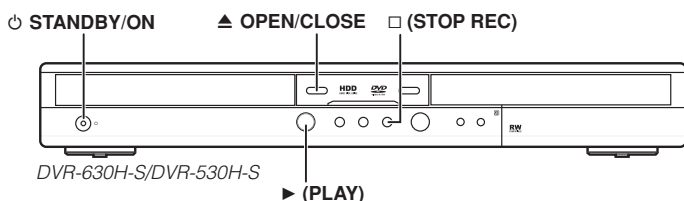

- 5** The disc tray automatically closes. Stop holding down button and do not perform any operations until the updating process completes in step 8.

- 6** The disc tray opens after a while. Remove the update disc from the disc tray. Do not close the disc tray but leave it open.

- 7** The updating process begins. "LOAD" appears in the front panel display, and the display changes as follows:



- 8** The disc tray automatically closes after approximately 5 minutes, and the power is switched off. This completes the updating procedure.

If "WRT FAILED" or "HDD ERR" appears in the front panel display, switch off the power and follow the updating procedure again from step **1**.

("HDD ERR" continues to be displayed, but you can perform the updating procedure with the same operations as described above.)